



GYPSOL

**A HEAVY DUTY
GYPSOL SCREED**


XS DATASHEET

DESCRIPTION

Gypsol XS self compacting flowing screed is made to exacting standards by quality assured manufacturers to BS EN 13813:2002. It is a combination of high quality **Gypsol** binder, specially selected sands, water and special additives where required. It is an enhanced strength mix, which offers a minimum CA-C30-F6. **Gypsol** XS is suitable for the encapsulation of underfloor heating systems, either electric or warm water.

Gypsol XS is suitable for use in both residential and commercial properties, including apartments, schools, prisons, hospitals and single dwellings where higher loadings and more durable screeded floors are required. In common with all **Gypsol** screeds, **Gypsol** XS screed also improves the environmental characteristics of the floor. For project specific advice on design and for a Model NBS Specification Template contact our technical and specifications team on **01928 574574**.

TYPICAL APPLICATION SCHEMATIC

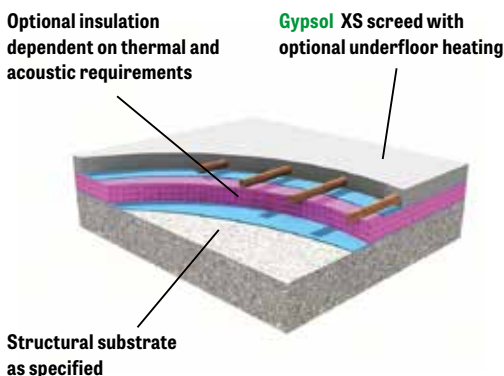

PHYSICAL DATA

Appearance		Off white fluid mortar
Density	Wet	2200kg/m ³
	Dry	2000kg/m ³
Minimum strength		C30-F6
Required flow (EN 13454-2)		230mm to 270mm
Reaction to fire		Class A ₁ non combustible

PERFORMANCE DATA

Working time	Place and finish within 3 hours of batching
Foot traffic	24 to 48 hours
Loading	5 to 7 days
Drying (50mm depth)	At 20°C and 60% RH - 28 days ^[1]
	Active force drying - 13 days ^[1]
	Drying times vary dependent on screed depth, ambient conditions and suitability of the building envelope.
	^[1] Independently tested and verified by Action Dry Ltd. Full report available on request.
Force Drying	Can be force dried after 7 days

ENVIRONMENTAL DATA

Recycled content	Binder	98%
	Mortar	up to 40%
Carbon emissions	Binder	10 to 30kg/tonne
	Mortar	30 to 50kg/m ³
VOC		Virtually zero
Recyclability		100%

HEALTH AND SAFETY DATA

Gypsol XS screeds are delivered to site ready to use via offsite mixing plants removing the need for labour intensive site mixing and associated mixing equipment.

Gypsol XS screeds are pumped directly to where they are needed removing much of the manual handling operations required to install other screeds.

Gypsol XS screeds are generally pumped using equipment with closed or gridded dispensing hoppers removing risk of contact with moving machinery.

Gypsol XS screeds are finished using a lightweight dappling bar requiring no secondary compaction thus removing most of the physical work needed to lay other screeds. This significantly reduces the negative impact on the musculo-skeletal system of installing contractors. For material safety information please see the relevant health and safety data sheets.



t: **01928 574574**
 e: ff@francisflower.co.uk
 w: www.gypsol.co.uk

Issue 7 :
 27 June
 2017